



Display Your Success!

ALUMINIUM PROFILES

SINGLE SIDE	3
DOUBLE SIDE	17

ILLUMINATION OPTIONS

MODULE LED'S	28
BACKLIT	29
EDGE LIT	32

ACCESSORIES

FREE STANDING UNITS	36
PVC / SILICONE STRIPES	36
POWER SUPPLIES	37




SINGLE SIDE

H PROFILE

Product Code: Tbx H




- Single side
- Illuminated / Non-Illuminated
- Usable for alcove areas
- Illuminated or non-illuminated option according to area

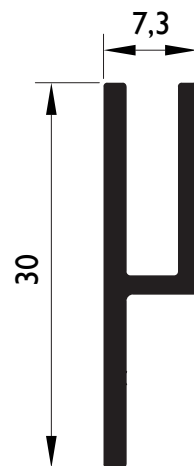

15 MM PROFILE

Product Code: Tbx Frame 15

- Single side
- Non-Illuminated
- Frame depth 15 mm
- Mountable on the wall
- Easy installation and visual changement
- Different size options
- Different color options
- Easy transport as demounted

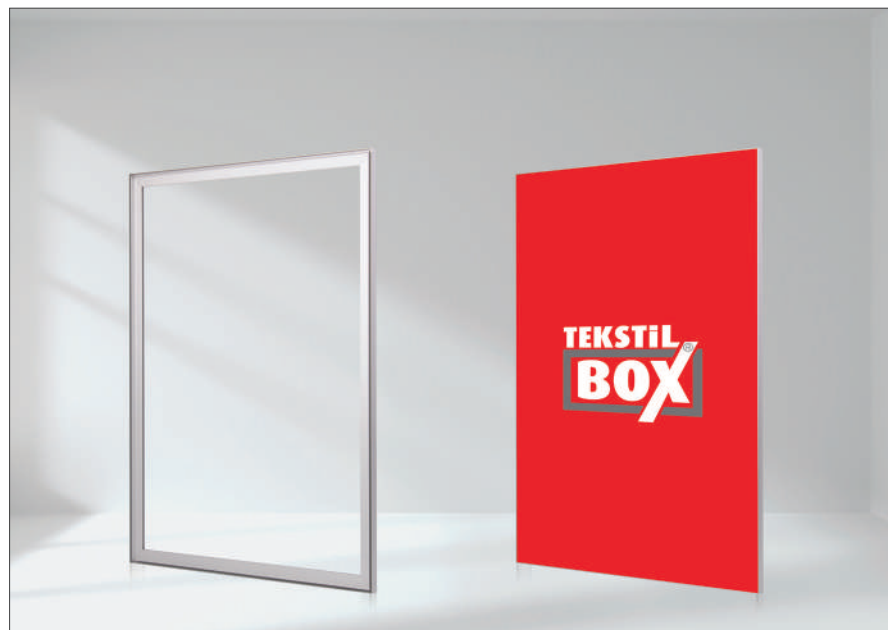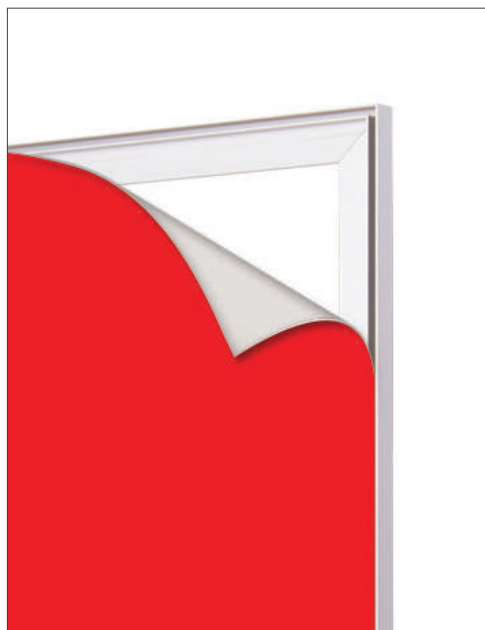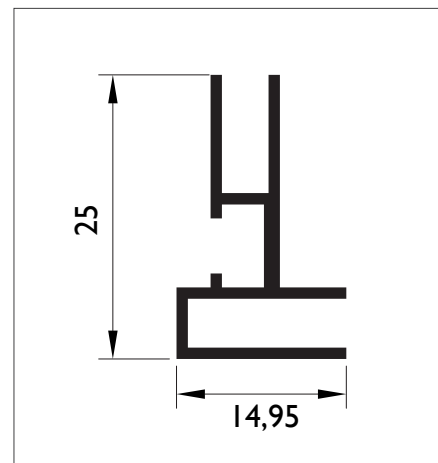

Illuminated



Non-Illuminated




Radius

18 MM PROFILE

Product Code: Tbx Frame 18


- Single side
- Non-Illuminated
- Frame depth 18 mm
- Mountable on the wall
- Easy installation and visual changement
- Different size options
- Different color options
- Easy transport as demounted

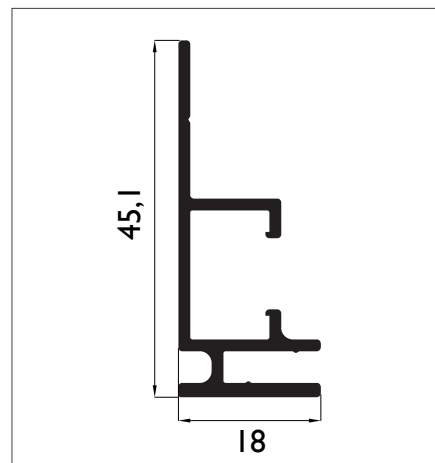

30 MM MODULAR PROFILE

Product Code: Tbx Frame 30 Mod.

- Single side
- Non-Illuminated
- Frame depth 30 mm
- Mountable on the wall
- Usable for modular displays
- Easy installation and visual changement
- Different size options
- Different color options
- Easy transport as demounted

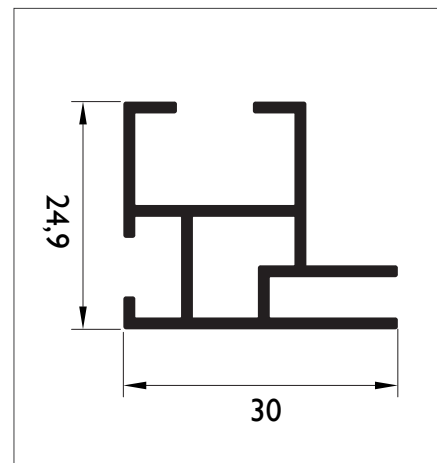

Illuminated



Non-Illuminated




Radius

30 MM PROFILE

Product Code: Tbx Frame 30


- Single side
- Non-Illuminated
- Frame depth 30 mm
- Mountable on the wall
- Easy installation and visual changement
- Different size options
- Different color options
- Easy transport as demounted

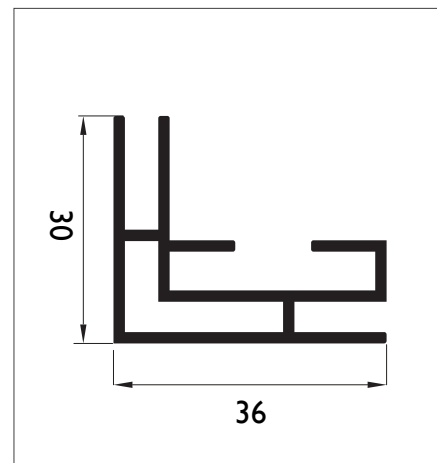

45 MM PROFILE

Product Code: Tbx Lightbox 45

- Single side
- Backlit Illuminated
- Frame depth 45 mm
- Mountable on the wall
- Easy installation and visual changement
- Different size options
- Different color options
- Easy transport as demounted

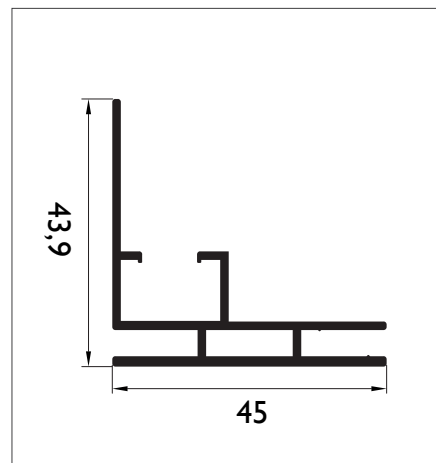

Illuminated



Non-Illuminated




Radius

DIAMOND PROFILE

Product Code: Tbx Diamond


- Single side
- Backlit Illuminated
- Usable for colonne covering
- Mountable on the wall
- Easy visual changement
- Different size options
- Different color options
- Easy transport as demounted

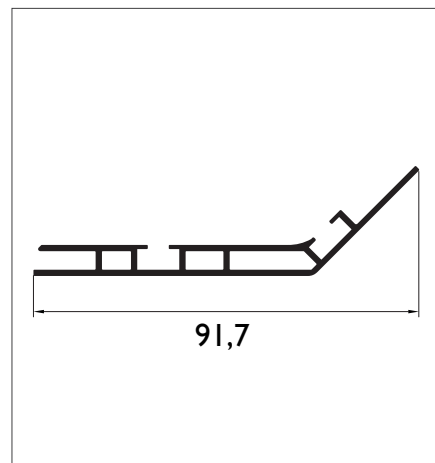

50 MM PROFILE

Product Code: Tbx Lightbox 50

- Single side
- Backlit Illuminated
- Frame depth 50 mm
- Mountable on the wall
- Easy visual changement
- Different size options
- Different color options
- Easy transport as demounted

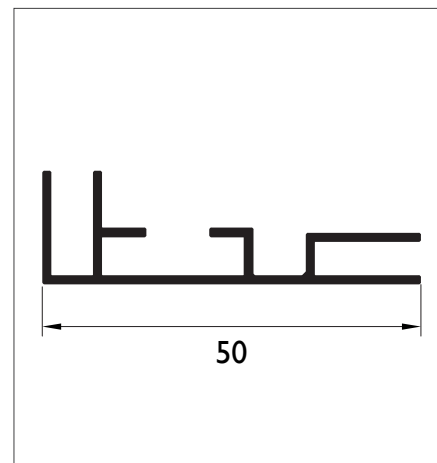

Illuminated



Non-Illuminated




Radius

75 MM PROFILE

Product Code: Tbx Lightbox 75


- Single side
- Edgelit Illuminated
- Frame depth 75 mm
- Mountable on the wall
- Easy installation and visual changement
- Different size options
- Different color options
- Easy transport as demounted

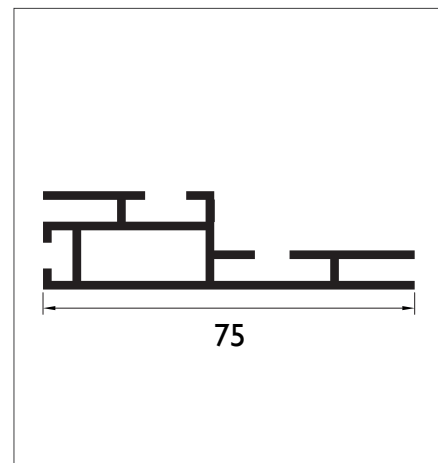

80 MM ECO PROFILE

Product Code: Tbx Lightbox 80 Eco

- Single side
- Edgelit / Backlit Illuminated
- Frame depth 80 mm
- Mountable on the wall
- Easy installation and visual changement
- Different size options
- Different color options
- Easy transport as demounted

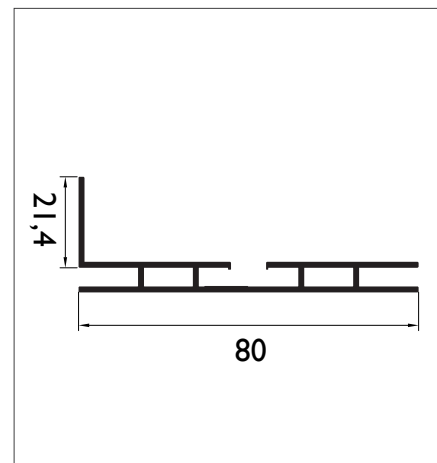

Illuminated



Non-Illuminated




Radius

80 MM PROFILE

Product Code: Tbx Lightbox 80


- Single side
- Edgelit / Backlit Illuminated
- Frame depth 80 mm
- Mountable on the wall
- Easy installation and visual changement
- Different size options
- Different color options
- Easy transport as demounted

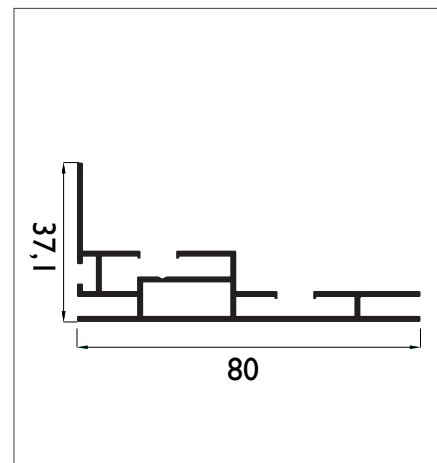

AJ80 MM PROFILE

Product Code: Tbx Lightbox AJ80

- Single side
- Edgelit Illuminated
- Frame depth 80 mm
- Easy Connector is an option
- Easy installation and visual changement
- Different size options
- Different color options
- Easy transport as demounted

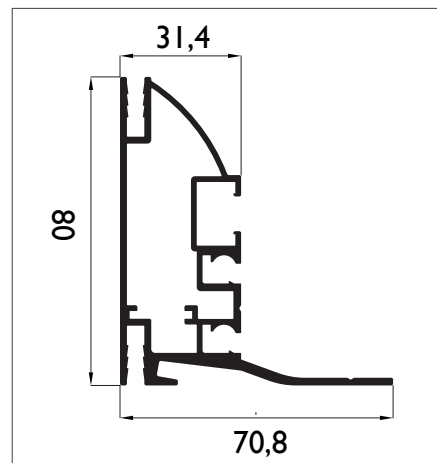

Illuminated



Non-Illuminated




Radius

100 MM PROFILE

Product Code: Tbx Lightbox 100


- Single side
- Edgelit / Backlit Illuminated
- Frame depth 100 mm
- Mountable on the wall
- Easy installation and visual changement
- Different size options
- Different color options
- Easy transport as demounted

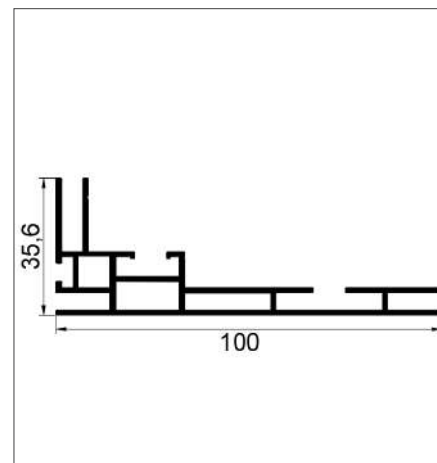

I 140 MM OUTDOOR PROFILE

Product Code: Tbx Lightbox 140

- Single side
- Backlit Illuminated
- Frame depth 140 mm
- Mountable on the wall
- Easy installation and visual changement
- Different size options
- Different color options
- Easy transport as demounted

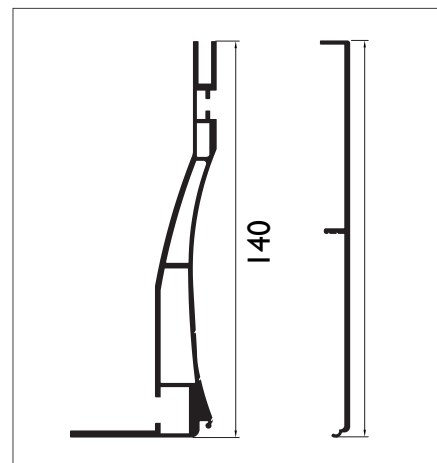

Illuminated



Non-Illuminated




Radius

AJ Z PROFILE

Product Code: Tbx Frame AJZ

- Single side
- Edgelit Illuminated
- Easy installation and visual changement
- Different size options
- Different color options
- Easy transport as demounted

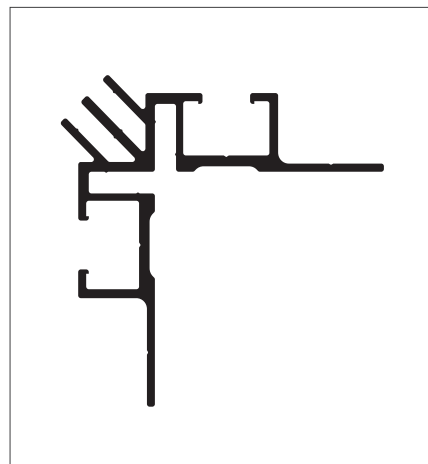




DOUBLE SIDE

30 MM PROFILE

Product Code: Tbx Lightbox 30


- Double side
- Plexi Illuminated
- Frame depth 30 mm
- Easy installation and visual changement
- Different size options
- Different color options
- Easy transport as demounted

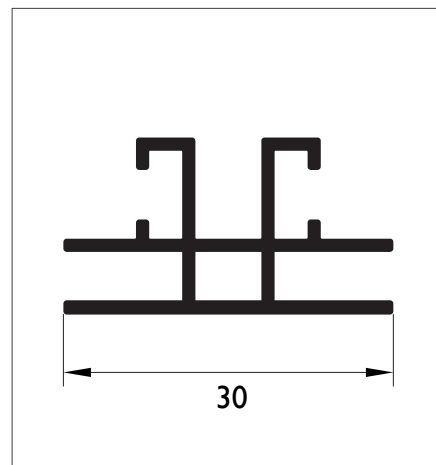

47,5 MM PROFILE

Product Code: Tbx Frame 47,5

- Double side
- Non-illuminated
- Frame depth 47,5 mm
- Easy installation and visual changement
- Big size display opportunity as modular
- Different size options
- Different color options
- Easy transport as demounted

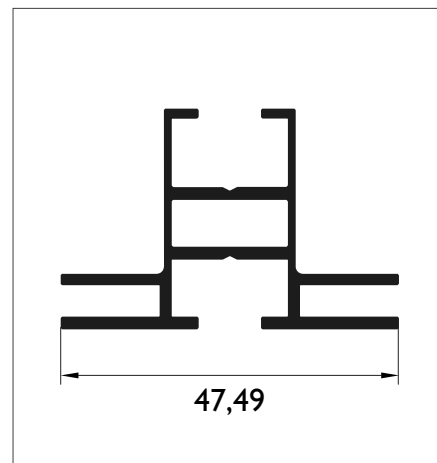

Illuminated



Non-Illuminated





Radius

50 MM PROFILE

Product Code: Tbx Frame 50


- Double side
- Non-illuminated
- Frame depth 50 mm
- Easy installation and visual changement
- Different size options
- Different color options
- Easy transport as demounted

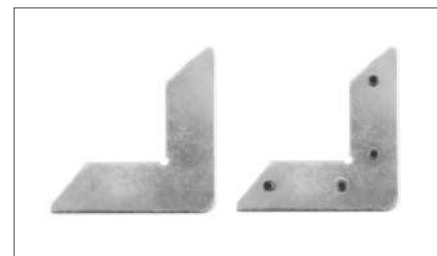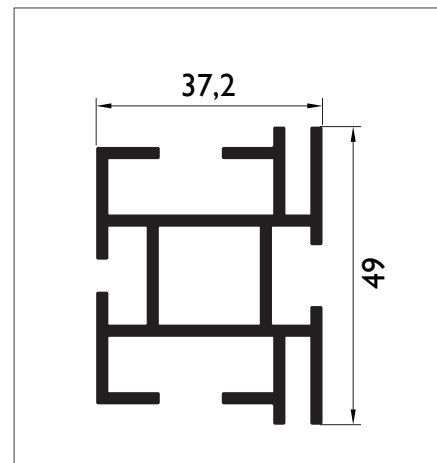

60 MM PROFILE

Product Code: Tbx Lightbox 60

- Double side
- Edgelit Illuminated
- Frame depth 60 mm
- Easy installation and visual changement
- Different size options
- Different color options
- Easy transport as demounted

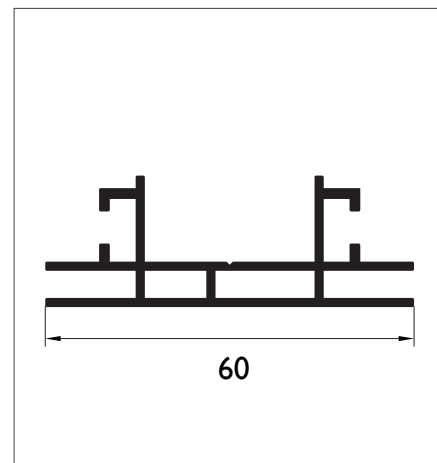

Illuminated



Non-Illuminated




Radius

100 MM PROFILE

Product Code: Tbx Lightbox 100


- Double side
- Edgelit Illuminated
- Frame depth 100 mm
- Easy installation and visual changement
- Different size options
- Different color options
- Easy transport as demounted

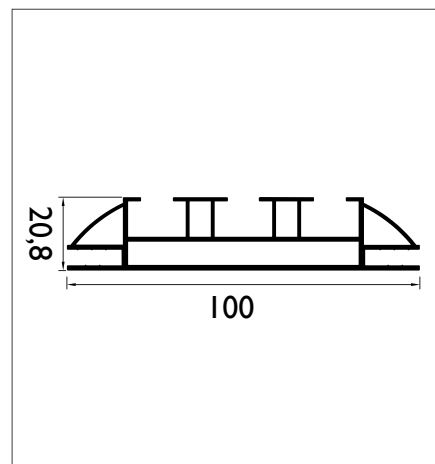

120 MM PROFILE

Product Code: Tbx Lightbox 120

- Double side
- Edgelit Illuminated
- Frame depth 120 mm
- Easy installation and visual changement
- Different size options
- Different color options
- Easy transport as demounted

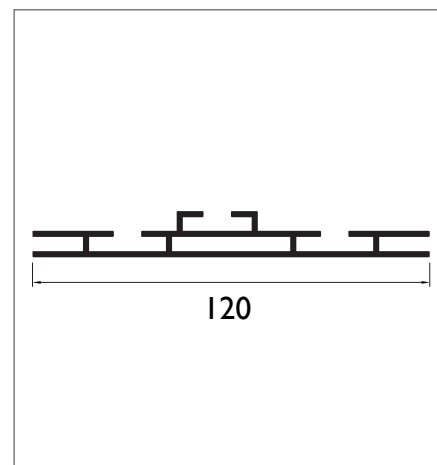

Illuminated



Non-Illuminated




Radius

AJ 120 MM PROFILE

Product Code: Tbx Lightbox AJ 120


- Double side
- Edgelit Illuminated
- Frame depth 120 mm
- Easy Connector is an option
- Easy installation and visual chngement
- Different size options
- Different color options
- Easy transport as demounted

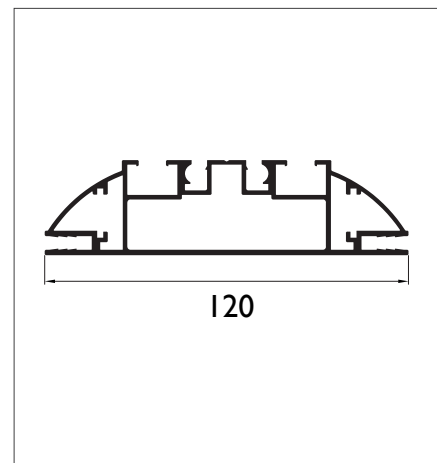

I 30 MM SHOPWINDOWS PROFILE

Product Code: Tbx Lightbox I30

- Double side
- Edgelit Illuminated
- Frame septh I 30 mm
- For shopwindows usage
- Easy installation and visual chngement
- Different size options
- Different color options
- Easy transport as demounted

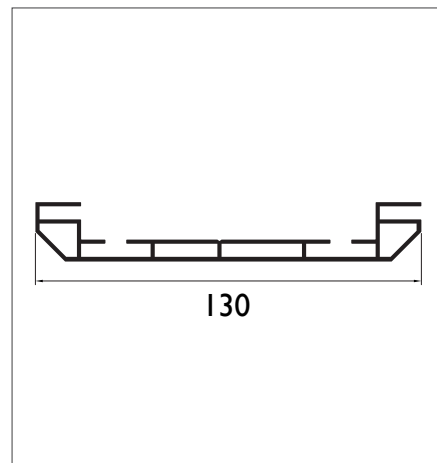

Illuminated



Non-Illuminated




Radius

160 MM PROFILE

Product Code: Tbx Lightbox 160


- Double side
- Edgelit Illuminated
- Frame depth 160 mm
- Easy installation and visual changement
- Different size options
- Different color options
- Easy transport as demounted

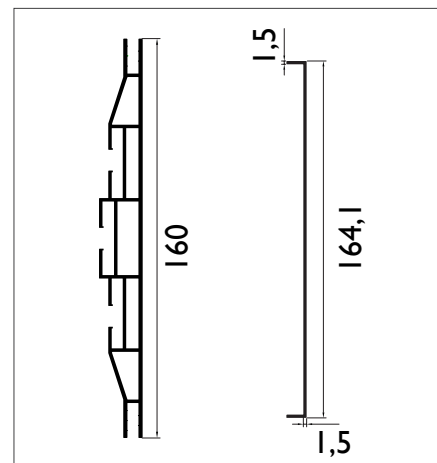

200 MM PROFILE

Product Code: Tbx Lightbox 200

- Double side
- Edgelit Illuminated
- Frame depth 200 mm
- Easy installation and visual changement
- Different size options
- Different color options
- Easy transport as demounted

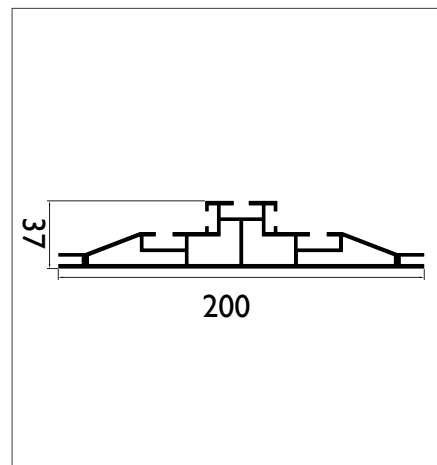

Illuminated



Non-Illuminated





Radius

CUBE PROFILE

Product Code: Tbx Lightbox Cube

- Double side
- Edgelit Illuminated
- Easy installation and visual changement
- Different size options
- Different color options
- Easy transport as demounted

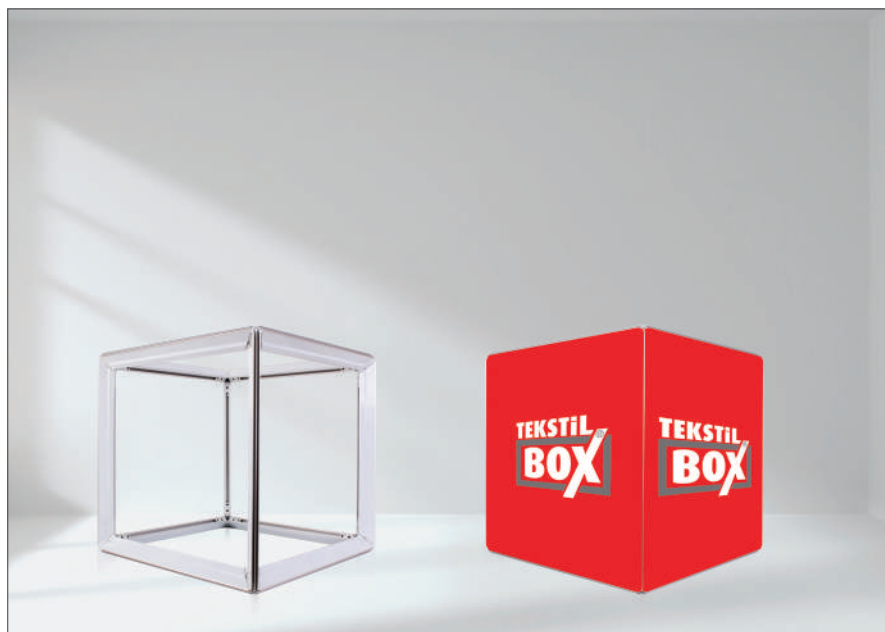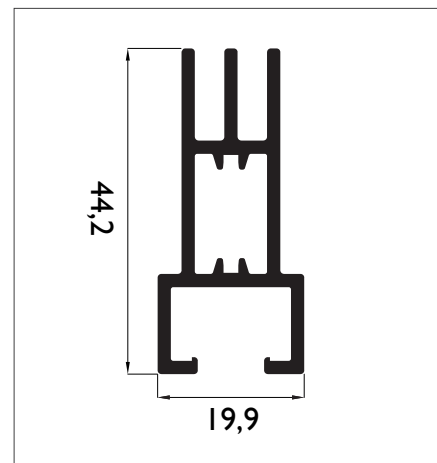



ILLUMINATION OPTIONS

2W MODULE LED



Code Name	LD.LED.ML.12
Size (mm)	43 x 36,3 x 15
CCT (K)	9500 - 10000K
View Angle (°)	15° x 45°
Luminous Flux (lm)	180
Voltage	12
Power (W/pcs)	2
IP Class	IP65
Maximum Serial Connection	20

2,7W MODULE LED



Code Name	LD.LED.ML.11
Size (mm)	60 x 40 x 17,6
CCT (K)	6000 - 6500K
View Angle (°)	45° x 15°
Luminous Flux (lm)	230
Voltage	12
Power (W/pcs)	2,7
IP Class	IP65
Maximum Serial Connection	15

NEW ECO SLIM LED BAR
BACKLIT



Code Name	LD.LED.BL28
Size (mm)	480 (6 lenses) Cuttable 240 mm
CCT (K)	6000 - 6500K
View Angle (°)	160°
Luminous Flux (lm)	330
Voltage	12
Power (W/pcs)	3,6
IP Class	IP20
Maximum Serial Connection	5

AL SLIM LED BAR (360 MM - 630 MM)
BACKLIT



Code Name	LD.LED.BL09	LD.LED.BL10
Size (mm)	360 (4 lenses)	630 (7 lenses)
CCT (K)	6000 - 6.500 K	6000 - 6500K
View Angle (°)	160°	160°
Luminous Flux (lm)	188	330
Voltage	24	24
Power (W/pcs)	3,2	3,2
IP Class	IP60	IP60
Maximum Serial Connection	8	8

AL SLIM LED BAR (475 MM)
BACKLIT



Code Name	LD.LED.BL33
Size (mm)	475 (6 lenses)
CCT (K)	6000 - 6500K
View Angle (°)	160°
Luminous Flux (lm)	550 - 600
Voltage	12
Power (W/pcs)	6
IP Class	IP60
Maximum Serial Connection	4

AL SLIM LED BAR (475 MM - 950 MM)
BACKLIT



Code Name	LD.LED.BL29	LD.LED.BL30
Size (mm)	475 (6 lenses)	950 (12 lenses)
CCT (K)	10000K	10000K
View Angle (°)	160°	160°
Luminous Flux (lm)	550 - 600	1100 - 1200
Voltage	12	12
Power (W/pcs)	6	12
IP Class	IP60	IP60
Maximum Serial Connection	4	2

CURTAIN LED BAR

BACKLIT



Code Name	LD.LED.BL31	LD.LED.BL32
Size (mm)	475 (6 lenses)	950 (12 lenses)
CCT (K)	6000 - 6500K	6000 - 6500K
View Angle (°)	160°	160°
Luminous Flux (lm)	550 - 600	1100 - 1200
Voltage	12	12
Power (W/pcs)	6	12
IP Class	IP60	IP60
Maximum Serial Connection	15	10

AL SLIM LED BAR (475 MM)

BACKLIT



Code Name	LD.LED.BL39
Size (mm)	475 (6 lenses)
CCT (K)	6000 - 6500K
View Angle (°)	160°
Luminous Flux (lm)	550 - 600
Voltage	12
Power (W/pcs)	6
IP Class	IP60
Maximum Serial Connection	15

EKO CONIC LED BAR EDGELIT



Code Name	LD.LED.SL.23	LD.LED.SL.24
Size (mm)	250 (3 lenses)	450 (5 lenses)
CCT (K)	6000 - 6500K	6000 - 6500K
View Angle (°)	15° - 45°	15° - 45°
Luminous Flux (lm)	520	900
Voltage	24	24
Power (W/pcs)	8,4	14,4
IP Class	IP44	IP44
Maximum Serial Connection	10	5

CONIC LED BAR EDGELIT



Code Name	LD.LED.SL.12	LD.LED.SL.13
Size (mm)	200 (3 lenses)	440 (6 lenses)
CCT (K)	6000 - 6500K	6000 - 6500K
View Angle (°)	15° - 45°	15° - 45°
Luminous Flux (lm)	600	1200
Voltage	24	24
Power (W/pcs)	6	12
IP Class	IP53	IP53
Maximum Serial Connection	10	5

S SIDE LED BAR EDGELIT



Code Name	LD.LED.SL.19	LD.LED.SL.20
Size (mm)	300 (3 lenses)	500 (5 lenses)
CCT (K)	7000 - 7500K	7000 - 7500K
View Angle (°)	15° - 45°	15° - 45°
Luminous Flux (lm)	635	1055
Voltage	24	24
Power (W/pcs)	9,6	16,8
IP Class	IP64	IP64
Maximum Serial Connection	10	5

ULTRA CONIC LED BAR EDGELIT



Code Name	LD.LED.SL.08	LD.LED.SL.07
Size (mm)	200 (4 lenses)	500 (10 lenses)
CCT (K)	6000 - 6500K	6000 - 6500K
View Angle (°)	15° - 45°	15° - 45°
Luminous Flux (lm)	800	2000
Voltage	24	24
Power (W/pcs)	8	20
IP Class	IP53	IP53
Maximum Serial Connection	10	3





ACCESSORIES

FREE STANDING UNITS



Flat Foot
100 x 450 mm



Flat Foot
165 x 500 mm



Radius Foot
500 x 100 mm



Raised Foot
500 x 50 x 30 mm



Delta Foot
200 x 400 mm



Delta Foot
350 x 350 mm



Round Foot
350-500 x 5 mm



Elips Foot
600 x 400 mm




360° Foot
400 x 400 x 100 mm

PVC / SILICONE STRIPES



PVC Transparent Stripes
13 x 3 mm



PVC Transparent Stripes
10,5 x 3 mm



PVC White Stripes
13 x 3 mm



Silicone White Stripes
15 x 3,5 mm

POWER SUPPLIES



MODEL	LPV-20-12	LPV-35-12	LPV-60-12	LPV-100-12	LPV-150-12
POWER	20W	36W	60W	100W	120W
DS VOLTAGE	12V	12V	12V	12V	12V
CURRENT	1,67A	3A	5A	8,5A	10A
EFFI.	81%	84%	83%	85%	87%
WORK. TEMP.	-30 +70°	-30 +65°	-30 +70°	-25 +70°	-25 +65°



MODEL	LPV-20-24	LPV-35-24	LPV-60-24	LPV-100-24	LPV-150-24
POWER	20W	36W	60W	100W	150W
DS VOLTAGE	24V	24V	24V	24V	24V
CURRENT	0,84A	1,5A	2,5A	4,2A	6,3A
EFFI.	83%	85%	86%	88%	89%
WORK. TEMP.	-30 +70°	-30 +65°	-30 +70°	-25 +70°	-25 +65°



MODEL	ULTRA SLIM 48-12	ULTRA SLIM 60-12
POWER	48W	60W
DS VOLTAGE	12V	12V
CURRENT	4A	5A
EFFI.	84%	84%
WORK. TEMP.	-30 +70°	-30 +70°



MODEL	ULTRA SLIM 48-24	ULTRA SLIM 60-24	ULTRA SLIM 72-24
POWER	48W	60W	72W
DS VOLTAGE	24V	24V	24V
CURRENT	2A	2,5A	3A
EFFI.	86%	86%	86%
WORK. TEMP.	-30 +70°	-30 +70°	-30 +70°

POWER SUPPLIES



MODEL	LRS-35-12	LRS-50-12	LRS-75-12	LRS-100-12
POWER	36W	50W	72W	102W
DS VOLTAGE	12V	12V	12V	12V
CURRENT	3A	4,2A	6A	8,5A
EFFI.	86%	86%	89%	88%
WORK. TEMP.	-30 +70°	-30 +70°	-30 +70°	-30 +70°



MODEL	LRS-35-24	LRS-50-24	LRS-75-24	LRS-100-24
POWER	36W	53W	77W	108W
DS VOLTAGE	24V	24V	24V	24V
CURRENT	1,5A	2,2A	3,2A	4,5A
EFFI.	88%	88%	90%	90%
WORK. TEMP.	-30 +70°	-30 +70°	-30 +70°	-30 +70°



MODEL	LRS-150-12	LRS-200-12	LRS-150-24	LRS-200-24
POWER	150W	204W	156W	211W
DS VOLTAGE	12V	12V	24V	24V
CURRENT	12,5A	17A	6,5A	8,8A
EFFI.	87,5%	87,5%	89%	89,5%
WORK. TEMP.	-30 +70°	-25 +70°	-30 +70°	-25 +70°



MODEL	LRS-350-12	LRS-350-24
POWER	348W	350W
DS VOLTAGE	12V	24V
CURRENT	29A	14,6A
EFFI.	85%	88%
WORK. TEMP.	-25 +70°	-25 +70°

TEKSTİL BOX[®]


fabric display solutions



LONG LIFE



LOW COST




INNOVATION



ECO FRIENDLY



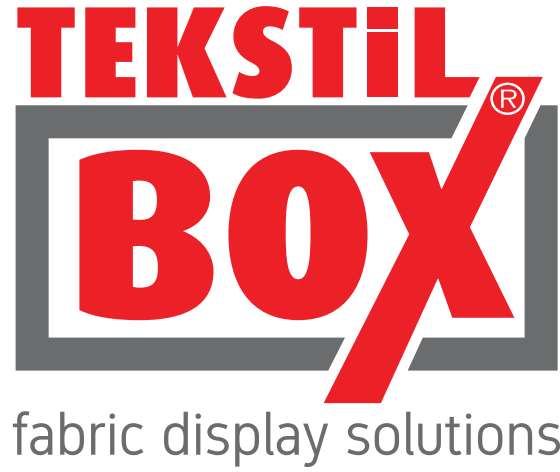

MEHMET NESİH ÖZMEN MH. SAVUR SK. NO: 22
MERTER - GÜNGÖREN - İSTANBUL / TURKEY

P +90 212 637 76 68 | F +90 212 637 03 38
info@tekstilbox.com | www.tekstilbox.com

